

Ventilation Packs

room ventilation packs and gas appliance packs

- Three airflow levels
- Complete ventilation packages
- Accompanying protective cavitrays
- Easy stock control and selection



use

Provide ventilation to habitable rooms. Also air ventilation for areas in which boilers are enclosed.

introduction


A total of three packs, each of which consists of a cavibrick(s), a sleeve, an interior grille and a protective DPC cavitrays. Ideal for new construction and refurbishment work.

Pack 1: Single brick size. 6,700mm² airflow rating.
Pack 2: Two brick size. 13,700mm² airflow rating.
Pack 3: Three brick size. 20,700mm² airflow rating.

data

- Material PVCU and polypropylene.
- Exterior bricks in terracotta unless alternative colour ordered.

- Sleeves: black.
- Internal grilles: white.
- Packs available individually.

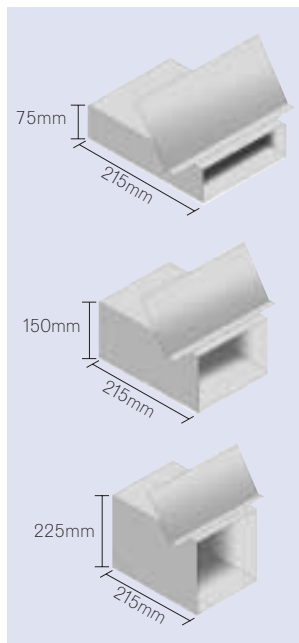


Consider for use where shown. See inside cover for key.

Type VF

ventilating flashing

- Use in place of ordinary lead
- Easy to dress
- Ventilates and flashes in one operations
- Pre-creased for speedy application
- Suits popular roof pitches*

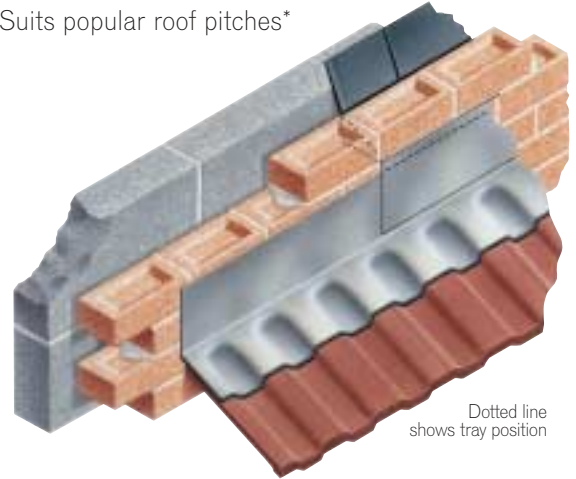

Dotted line shows tray position

use

To provide flashing and ventilation at roof and wall intersections.


introduction

Where a monopitch roof abuts a masonry wall there is a requirement to provide ventilation of the equivalent of a 5mm continuous gap. The Type VF Ventilating Flashing is manufactured from British Standard lead to which is bonded a breathing base layer that permits air to enter and exit.

When correctly incorporated at the roof / wall intersection, and flashing can provide the airflow requirement. Thus the Type VF Ventilating Flashing looks like and may be substituted in preference to ordinary flashing. It offers the advantage of permitting a roof to breathe – naturally. Always make provision for air travelling via the flashing to reach the intended parts of the roof.

data

- Code 4 British Standard lead to BS EN 12588:1999.
- Semi compressible Derexculcate breathing base layer.
- Packaged solution for regulation compliance.
- Boxed 3 No. 1200mm x 300mm pre-creased lengths per box.
- Pitch applications 22.5° to 80°.
- May be conventionally restrained if required.
- Available in boxed quantities.

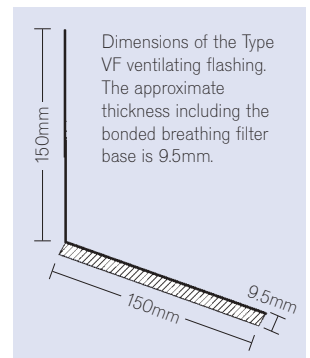

Consider for use where shown. See inside cover for key.

