


Type CRSS

continuous running soaker strip

- Pre-shaped for immediate use
- Hidden from view when insulated
- Suitable for pitches from 22.5 degrees up to 60 degrees
- Lightweight and easy to handle

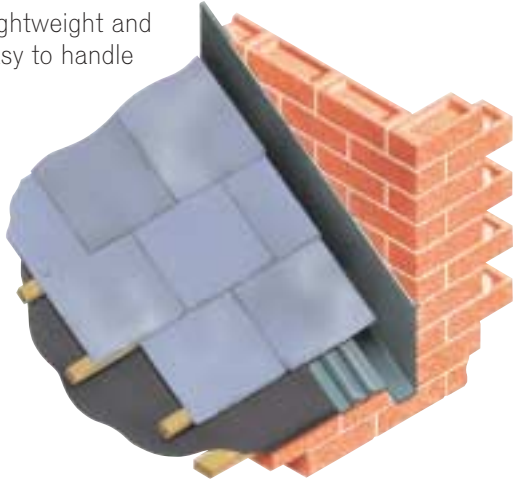


use

Continuous soaker for use with slate roof where it abuts a masonry wall.

introduction

The Continuous Running Soaker Strip is pre-shaped for immediate use. It resembles lead in colour and may be employed with conventional lead at the saddle and the foot. The upstand is unlippped, which eliminates the necessity to chase into the masonry wall.



Type CRSS can be directly mechanically secured through its upstand towards the top of the section.

data

- Glass reinforced polyester.
- Colour lead grey.
- 105mm high x 190mm wide x 3000mm.
- Suitable for pitches from 22.5 degrees up to 60 degrees.
- Pre-shaped for immediate use.
- Hidden from view when installed.
- Lightweight and easy to handle.
- Permits use of conventional saddle and foot.
- Available individually.

Type ECSC

eaves continuous slate course

- Reduces costs and site work
- Hidden from view when installed
- Robust and easy to handle
- Suitable for all standard pitches of slate roof



use

As substitute for first (bottom layer) slate course providing support and reducing slate cutting.

introduction

The Eaves Continuous Slate Course replaces the eaves first slate course and establishes rigidity and consistent support off which the slate laying and fixing may commence.

Thus the amount of slate and slate cutting is reduced.

Installation is speedy and savings can be achieved in both time and overall purchasing costs.

data

- Glass reinforced polyester, 1.83 kg/m².
- Colour black.
- 360mm wide x 3000mm long.
- Supplied in packs of 10.
- Reduces costs and site work.
- Hidden from view when installed.
- Robust and easy to handle.
- Suitable for all standard pitches of slate roof.

