

# Type ECSC

## Eaves Continuous Slate Course



- Reduces costs and site work
- Provides rigidity and continuity along bottom edge
- Not visible once installed
- Lightweight and easy to handle

### USE

A substitute for the first course (bottom layer) of slate. Reduces slate cutting and minimises joints along weathering edge.

### SOLUTION

The Eaves Continuous Slate Course is used in place of slates to form the first course along the bottom of the roof.


This reduces the number of slates and the accompanying slate cutting normally required. Supplied in 3 metre lengths, installation is speedy,

easy to align and continuous runs are formed with the minimum of joints along the weathering edge. Subsequently the laying of whole slates may commence immediately.

### SPECIFICATION WORDING

Type ECSC Eaves Continuous Slate Course by Cavity Trays of Yeovil Somerset BA22 8HU (01935 474769).

Use as substitute on slate roofs for first (bottom layer) of slate prior to commencing slate fixing. Metres run .....

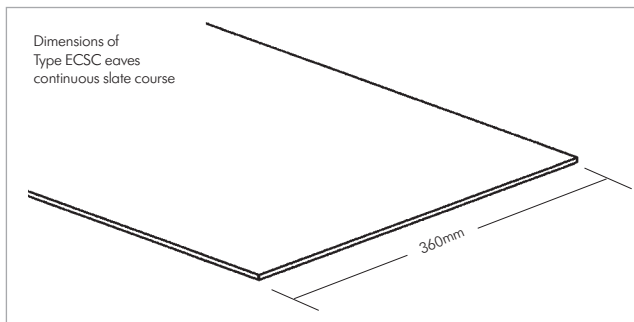

#### PRODUCT NAME - GROUP

Type Eaves Continuous Slate Course

#### ROOF PITCH SUITABILITY

All pitches

#### DIMENSIONS

3000mm x 360mm wide

#### BESPOKE OPTIONS

No

#### TRADITIONAL CONSTRUCTION COMPATIBLE

Yes

#### TIMBER FRAME CONSTRUCTION COMPATIBLE

Yes

#### NEW WORK APPLICATIONS

Yes

#### RETROFIT APPLICATIONS

Yes

#### CONGRUENT WITH OTHER ROOF ELEMENTS

No identified incompatibility

#### ARRESTED WATER EVACUATION

N/A acts as under layer first course

#### THERMAL TRANSMISSION OF MATERIAL

N/A external of masonry face

#### MATERIAL

Glass reinforced polyester

#### COLOUR

Grey finish

#### EXTRUDES / COMPRESSES UNDER LOAD

No

#### PACK SIZE

Packs containing 10 x 3000mm lengths

#### CFC

CFC Free

#### ODP

Zero

#### REGULATION COMPLIANCE

Can be used to provide weathering provision

#### CAD DOWNLOADS

Yes

#### DESIGN CONSIDERATIONS

Normal dissipation of roof space moisture via breathable under felt is hindered when slate, imitation slate or other close-fitting finishes are used. Always consider ventilation provision.

### DESIGNERS' COMMENTS

NHBC 7.2 – S11 (d) states bottom edges of slate roofs should be finished with an under-eaves course.