


# Hardedge Strip 1200

anti-pooling eaves and felt protector strip also special eaves protector\*

- Suitable for all roof pitches
- Provides even felt support
- Prevents water pooling
- Promotes correct discharge into gutter

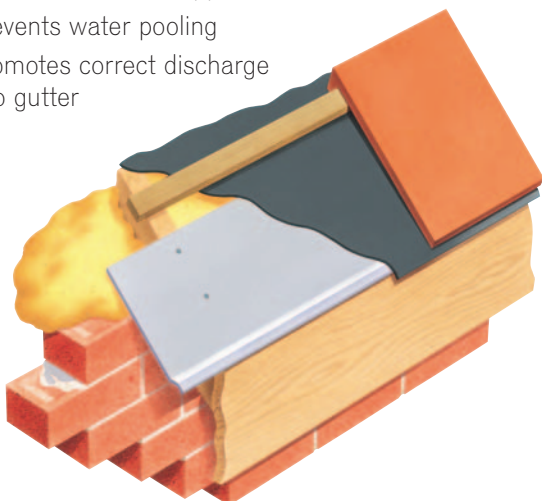

## use

Provides robust support and reinforcing of roofing felt at eaves.


## introduction

Underlay felt should discharge water into the eaves gutter. This requirement is often flawed, and pooling of water is experienced within the sagging felt area, situated behind the fascia board. The Hardedge anti-pooling strip addresses this aspect.

The Hardedge anti-pooling strip is a rigid preformed polypropylene profile, which is positioned at eaves level prior to the laying of the roofing underlay felt. It provides support of the underlay felt which is positioned and laid in the conventional manner. The underlay felt is prevented from sagging between rafters/tilting fillets, thus addressing the pooling problem.

## data

- Rigid polypropylene, black.
- 1200mm x 250mm.
- Suitable for use on roof pitches from 15 degrees up to 45 degrees.
- Provides even support to address anti-pooling.
- Projecting lip promotes correct felt positioning and discharge of water.
- Available in packs containing 10no.
- Smaller quantities available.




Hardedge 1200 profile and dimensions.

# Hardedge Strip 1500

anti-pooling eaves and felt protector strip also special eaves protector\*

- Suitable for all roof pitches
- Provides even felt support
- Prevents water pooling
- Promotes correct discharge into gutter

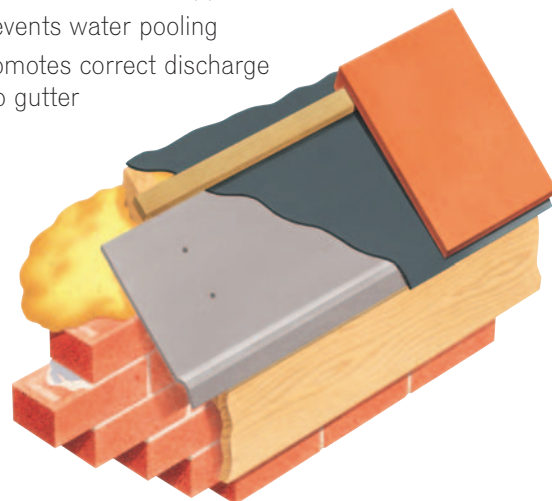

## use

Alternative felt support and anti-pooling hardedge for eaves protection.


## introduction

The Hardedge 1500 or Special Eaves Support as it is also known, is an extended and profiled version of the 1200 model. It is both longer and wider and offers even greater support and rigidity.

The front of this Special Eaves Protector extends forward to carry the projecting roofing felt forward of the fascia. Thus support is provided to a greater extent and the felt is encouraged to gravitate and terminate into the adjacent guttering. Manufactured from rigid polypropylene, the Hardedge 1500 / Special Eaves Protector is easily and speedily fixed in position prior to the roofing felt.

## data

- Size 1500mm x 300mm (225 + 75mm)
- Black PVCU.
- Suitable for use on roof pitches from 15 degrees up to 45 degrees.
- Stops water pooling.
- Supports felt and carries edge forward to gutter.
- Available in packs containing 10no.
- Smaller quantities available.



Hardedge 1500 profile and dimensions. This is also known as the special eaves protector.