


Type LAD

loft access door

- Fully finishes - ready to use
- Insulated fully removable door for easy access
- Integral resi-seals
- Provides uniform build quality and appearance

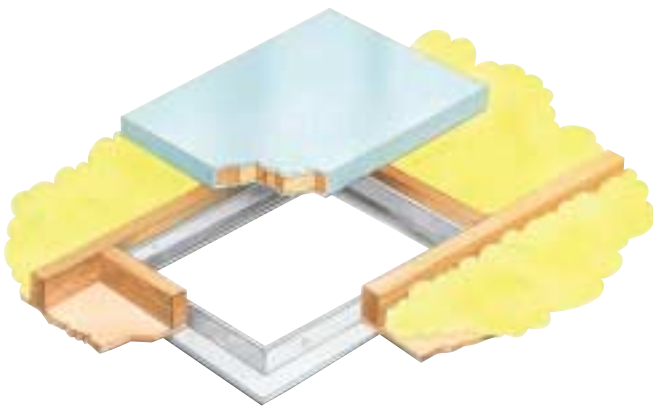

use

To gain access into roof space.

introduction

Prefabricated and self-finished insulated loft access door and frame. Can be fixed immediately between trimmed standard joists. The LAD loft access door and frame is supplied as a complete unit. It satisfies the contractor's total requirements in terms of aesthetics, finish, cost and stock control.

The white laminated door is fully removable, and is supported within a robust white PVC surround which may be directly fixed to standard trimmed joists. Within the surround are soft (draught) resi-seals which ensure the access door is correctly and completely accommodated.


As the lid is fully removable by lifting upwards, attic insulation can be cut and laid on top if required.

Zero ODP rigid urethane insulation offers thermally efficient performance as the core infill between composite foil facings applied to both sides of the urethane.

White-faced board is additionally laminated as the outer finish to the upper and lower faces of the removable door. Insulation thermal conductivity analysis given as 0.022-0.028 W/m.K. Incorporated within appropriate construction the insulation aggregate may be used to address part L requirements.

data

- Size 1 550mm x 750mm. (Trim to 555 x 775mm).
- Size 2 550mm x 550mm. (Trim to 555 x 555mm).
- White compound.
- A PVCU white laminated door with solid core of Insulation.
- Self-finished and ready to use.
- Insulated.
- Fully removable door on resi-seals.
- Available individually.

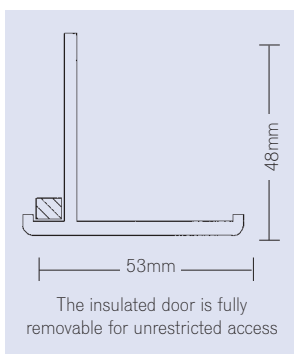

Downward Hinging Loft Access Door and Frame

- Ready finished
- Optional insulation upgrade
- Integral latch



use

Access into attic spaces.

introduction

Hinged downward opening loft access door for use where a door that can be fitted completely clear is not required. Available in one size only, the downward opening model requires a trimmed opening of approximately 566mm x 721mm. Made of lightweight PVCU and finished in white, the insulated door has an integral turn latch.

An optional ODP rigid urethane secondary layer can be supplied to

provide additional insulation to this model to increase thermal insulation performance and address part L target 0.022-0.028 W/m.K sampled typical analysis. Must be clearly specified as optional addition when ordering.

data

- Clear opening approx. 690mm x 535mm.
- Lightweight high impact polystyrene.
- White finish - requires no painting.
- Door contains provisional insulation.
- Available individually.