

# Roof Ventilator

## universal high performance roof ventilator for tiled roofs

- High airflow
- Integral baffle and grille
- Suitable for new and refurbished work
- High or low level applications



### use

Sloping roof ventilator for use at high or low level.

### introduction

The universal tile ventilator is designed for use with tiled roofs. Compatible with many styles of interlocking profiled tiles and plain tiles, the universal ventilator may normally be used on roof pitches from 20 degrees up to 70 degrees.

This ventilator promotes an air throughput rating of 15,000mm<sup>2</sup>, through an insect resistant integral screen. An optional adaptor permits the ventilator to be connected to a standard 110mm pipe if required. Position at appropriate centres at high or low level to provide requisite Building Regulation airflow rating.

### data

- Base 405mm x 440mm, cap 293mm x 210mm
- Airflow rating 15,000mm<sup>2</sup>.
- PVCU/foam/aluminium.
- Cap available in brown, terracotta or grey.
- Suitable for new and refurbishment work.
- Integral grille/screening.
- Suits wide range of tiles.
- Not recommended for Redland Delta, Cambrian, Saxon, Richmond, Anchor Centurion, Marley Monach, Clay pantiles, Slate. Always determine suitability. Double lap plain tiles require slight modification.
- Adaptor Kit for pipe connection – request Universal/K1
- Ventilator and Adaptor Kits are available individually.




Consider for use where shown. See inside cover for key.

# Type SSV

## strip soffit ventilator

- Regulation airflow compliance
- Integral fly screening
- Accepts different soffit thicknesses
- Self coloured - corrosion proof

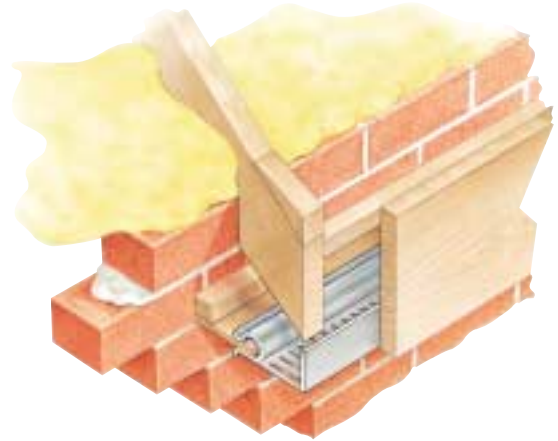

### use

Permits entry of air via soffit.



### introduction

The Type SSV strip soffit ventilator is designed for use with a standard soffit board. It permits airflow via the soffit area whilst also providing support for soffit boards from 4mm to 14mm thickness. The airflow rating is 10,800mm<sup>2</sup> per metre run, making it suitable for use where the roof pitch is 15 degrees or above.

The ventilation slots provide screening in accordance with regulations. (See Type SSV-15 for higher airflow rating.)

### data

- PVCU compound.
- Colours: white, brown or black.
- Size: 2400mm x 50mm x 20mm upstand.
- Airflow rating 10,800mm<sup>2</sup>
- Insect screening.
- Packed in boxes containing 20no.
- Smaller quantities available.



Consider for use where shown. See inside cover for key.