


Type FWC

Five Width Cavicloser

- Acts as a DPC
- Insulates the reveal
- One model provides five size options
- Straight reveal applications

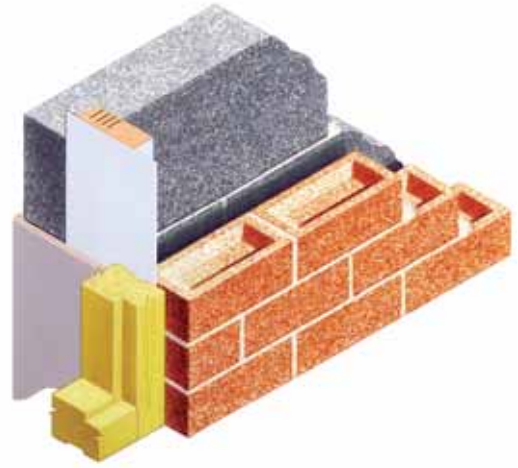

SOLUTION

The Type FWC offers the installer flexibility, as grooves in the insulating core denote where the core can be trimmed back to create a cavity closer to suit five different cavity widths. Thus this one model addresses the widths of cavity currently popular.


REFERENCES

- Building Regulations Part L
- British Standard 5628-3
- BRE Thermal Insulation Avoiding Risks
- Website: cavitytraystandards.co.uk
- Robust Details
- Scottish Tech Standards Part D

SPECIFICATION WORDING


Type FWC Five Width Cavicloser by Cavity Trays of Yeovil Somerset BA22 8HU (01935 474769) to close cavity wall reveal. Trim along grooves to suit intended cavity size.

Cill Detail



Typical application of the Type FWC used at cill level

Standard Reveal



The Type FWC is introduced into the cavity after the reveal masonry is raised

COMPUTER REFERENCE CODES:
FWC2.4

PRODUCT NAME - GROUP

Type FWC Five Width Cavicloser

EXPOSURE RATING

Severe 30+mm setback. Very severe when checked

CAVITY - STANDARD SIZES ACCOMMODATED

Suits 50mm, 65mm, 75mm, 85mm & 100mm

SPECIAL CAVITY WIDTHS ACCOMMODATED

Above five dimensions - trim to choice

STRAIGHT REVEALS

Yes - build in profile as supplied

CHECKED REVEALS

No

PRODUCT LENGTHS

2.4m

ACTS AS VERTICAL DPC

Yes

ACTS AS INSULATOR

Yes

PERMITS DIFFERENT FRAME POSITIONS

Yes

FRAMES FITTED AS WORK PROCEEDS OR LATER

Second fix

TIMBER FRAME / TRADITIONAL CONSTRUCTION

Both styles accommodated

MASONRY SKIN STYLES

All popular flat faced masonry

ACOUSTIC QUALITIES

N/A

FIRE RATED

No (see Cavi prefixed range for fire rated)

VERTICAL AND HORIZONTAL APPLICATIONS

Yes - see examples

COMPATIBLE WITH OTHER CAVITY WALL ELEMENTS

No known restrictions

SECURING TIES SUPPLIED

No - friction fitting + nail fix to block work

PACK SIZES

x 10 lengths

WEIGHT PER PACK

9 kg

MATERIAL

PVCU + orange polystyrene foam

COLOUR

White with orange insulation

BUILDING REGULATIONS

Yes regulations can be satisfied

NHBC / ROBUST DETAILS

Yes requirements can be satisfied

'K' VALUE OF INSULATION

0.030W/mK

CFC FREE

Yes - zero ODP

CAD DRAWING DOWNLOADS AVAILABLE

Yes



DESIGNERS' COMMENTS

Installer needs only one model to close most popular cavity widths.