


Type F

PVC Corrugated Flashing for use with PVC Sheeting

- Fills and flashes sheet top with masonry
- Adjusts to suit different roof angles
- Blends with roof finish

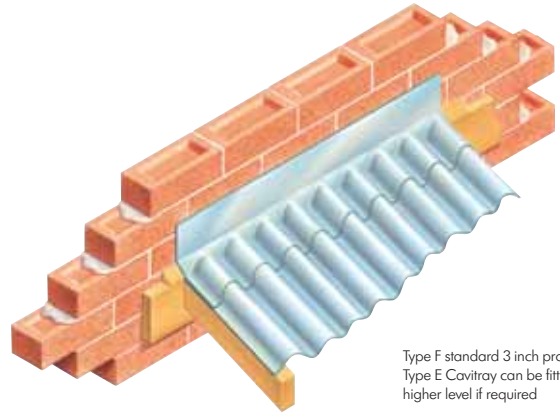

Type F standard 3 inch profile.
Type E Cavitytray can be fitted at higher level if required

USE


To flash the intersection between corrugated roof sheets and a masonry skin.

SOLUTION

Malleable flashings require considerable dressing to tightly follow the contours of any roofing sheet. Where the sheet is lightweight UPVC, such dressing is not an option. The alternative approach is to use a ready-moulded Type F Flashing.

Type F Flashings can be used on porches, lean-to's, outhouses, conservatories or temporary structures having lightweight translucent corrugated sheeting.

Each Type F Flashing has a moulded hinge line between its corrugated half and its flat upstanding half that locates against the wall surface. This permits the flashing to be used on roof pitches from 17.5 degrees up to 60 degrees. The flashings are fixed by simply positioning before securing the top of sheet fixings, that then hold both the sheet top and the flashings in place. The Type F fits into the corrugations snugly, whilst the upstand springs to shape vertically against the wall. The upstand can then be finished with a flashing / Cavitytray.

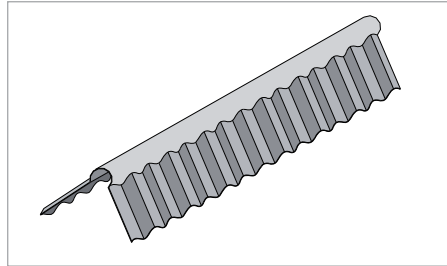

Type F Flashings are manufactured in 8 different profiles. A ridge flashing to unite where corrugated sheets meet in an apex is available in the Std 75mm/3" asbestos profile range only.

HOW TO ORDER

State profile and number of standard lengths required.

SPECIFICATION WORDING

Type F Flashing to corrugated sheeting intersections by Cavity Trays of Yeovil Somerset BA22 8HU (01935 474769).

Profile required (state) x metres run (state)
Request liability/conformity document upon completion.

PRODUCT NAME - GROUP

Type F Flashing Units

CAVITY WIDTHS ACCOMMODATED

N/A fixes against external face

DIMENSIONS – SHEET/WALL FLASHINGS

Std 75mm/3" asbestos profile x 715mm

Std 75mm/3" iron profile x 715mm

Miniature x 715mm

Grecca box profile 76/18mm x 715mm

Box profile 16mm x 715mm

Box profile 14mm x 715mm

Onduline Std (black) x 900mm

Onduline U18 (black) x 900mm

DIMENSIONS – RIDGE FLASHING

Std 75mm/3" asbestos profile x 700mm

BESPOKE OPTIONS

No

NEW WORK APPLICATIONS

Yes

RETROFIT APPLICATIONS

Yes

MASONRY SKIN STYLES

Upstand ideally abuts flat surface

UNDULATING MASONRY FACES

Upstand ideally abuts flat surface

CONGRUENT WITH OTHER WALL ELEMENTS

No known reactions

MATERIAL

Material Onduline Flashings only

UPVC SELF-EXTINGUISHING CLASSIFICATION

Polypropylene toning grade

COLOUR

Colour – Onduline only

CLEAR / TRANSLUCENT

Black

EXTRUDES / COMPRESSES UNDER LOAD

N/A

PACK SIZE / WEIGHT

Available individually

Also in packs of 50

CFC

CFC Free

ODP

Zero

CAD DOWNLOADS

No

DESIGN CONSIDERATIONS

Cavitytray required over intersection to comply with Building Regulations regarding habitable additions.

DESIGNERS' COMMENTS

All flashings are manufactured of a length slightly shorter than the width of a standard corrugated sheet to reduce likelihood of all overlaps coinciding and contributing to heat discolouration.