



Caviweeps / Cavivents

Caviweeps provide evacuation routes via which water arrested by trays, lintels and DPCs can discharge out of the structure. Cavivents provide ventilation apertures to permit the cavity to breathe. The specifier may select from a range varying in size, colour and functionality – some are dual function weep-vents.

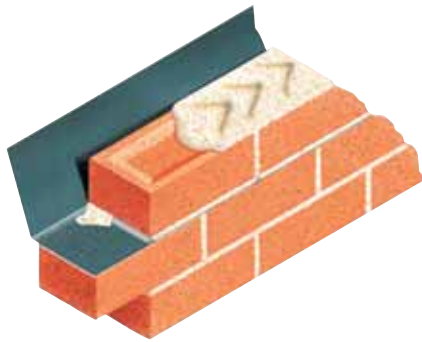


Pyramid Weep (Masonry Bleed Straw)

The Pyramid Weep is a small robust triangular conduit offering discreet and unobtrusive water evacuation. Positioning the Pyramid Weep so it 'peaks' in a perp joint permits it to be used where the bed courses are restricted or smaller than usual. Water and debris wash along its flat base that permits bedding in the lowest possible position for optimum evacuation.

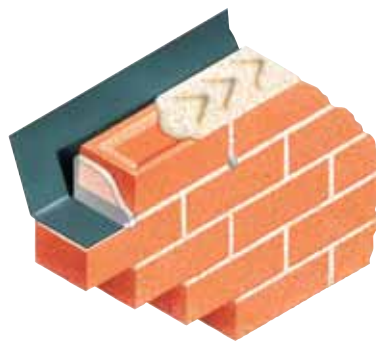

Beak Weep (Caviweep)

The Beak Weep offers discreet water discharge via a small protruding beak. The flow path is direct to an outlet at the bottom of the beak that provides protection against directly blowing wind. The Beak Weep matches the height of a standard perp joint, but has a reduced front section.

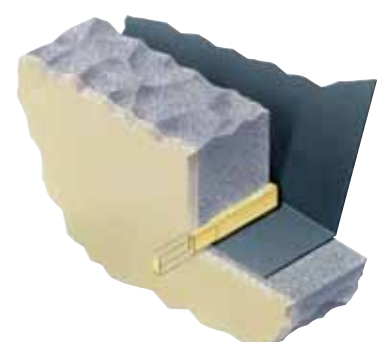

Small Weep-vent Small Adjustable Telescopic

The Small Adjustable Weepvent offers discreet appearance with a rectangular front discharge outlet and an insect resistant grille. A removable protective flap protects the front face from being contaminated during building-in. The telescopic body of this Weepvent permits it to be lengthened or shortened to suit different masonry thickness / rendered applications.

PRODUCT NAME - GROUP

Pyramid Weep

CAVITY WIDTHS ACCOMMODATED

All – width does not affect functionality

DIMENSIONS

Size 1: 100mm x 8mm x 8mm
Size 2: 240mm x 8mm x 8mm

TRADITIONAL CONSTRUCTION COMPATIBLE

Yes

TIMBER FRAME CONSTRUCTION COMPATIBLE

Yes

NEW WORK APPLICATIONS

Yes

RETROFIT APPLICATIONS

Yes

MASONRY SKIN STYLES

Suits all

UNDULATING MASONRY FACES

Compatible

MATERIAL

PVCU

COLOUR

Mortar grey

PACK SIZE

Packs of 100 and 500

CFC

CFC Free

ODP

Zero

REGULATION COMPLIANCE

Yes

MAY BE USED IF CAVITY INSULATION PRESENT?

Yes with compliant insulation types

CAD DOWNLOADS

No

DESIGN CONSIDERATIONS

Discreet appearance. Position at greater frequency than Perp Weeps. Min 200mm centres for arrestment evacuation and as required to bleed / drain features.

PRODUCT NAME - GROUP

Beak Weep

CAVITY WIDTHS ACCOMMODATED

All – width does not affect functionality

DIMENSIONS

Weep: 108mm x 65mm x 8mm
Ex duct: 200mm x 65mm x 9mm

TRADITIONAL CONSTRUCTION COMPATIBLE

Yes

TIMBER FRAME CONSTRUCTION COMPATIBLE

Yes

NEW WORK APPLICATIONS

Yes

RETROFIT APPLICATIONS

Yes

MASONRY SKIN STYLES

Suits all

UNDULATING MASONRY FACES

Compatible

MATERIAL

Polyprop

COLOUR

Translucent

PACK SIZE

Packs of 50

CFC

CFC Free

ODP

Zero

REGULATION COMPLIANCE

Yes

MAY BE USED IF CAVITY INSULATION PRESENT?

Yes with compliant insulation types

CAD DOWNLOADS

No

DESIGN CONSIDERATIONS

Suggested centres 450mm. Extension duct available.

PRODUCT NAME - GROUP

Small Adjustable Telescopic Weepvent

CAVITY WIDTHS ACCOMMODATED

All – width does not affect functionality

DIMENSIONS

93mm x 24mm x 9.5mm
Extends additional 70mm max

TRADITIONAL CONSTRUCTION COMPATIBLE

Yes

TIMBER FRAME CONSTRUCTION COMPATIBLE

Yes

NEW WORK APPLICATIONS

Yes

RETROFIT APPLICATIONS

Yes

MASONRY SKIN STYLES

Suits all

UNDULATING MASONRY FACES

Compatible

AIR FLOW AT GRILLE

60mm² aperture total

MATERIAL

Polyprop

COLOURS

Clear, grey, terracotta, beige, black

PACK SIZE

Packs of 100

CFC

CFC Free

ODP

Zero

REGULATION COMPLIANCE

Yes

MAY BE USED IF CAVITY INSULATION PRESENT?


Yes with compliant insulation types

CAD DOWNLOADS

No

DESIGN CONSIDERATIONS


Suggested centres 450mm.

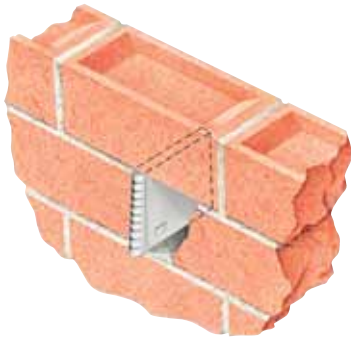

Type W Caviweep-Vent

The Type W is a dual-function combined weep and ventilator. It is finished with an inclined insect resistant grille that promotes excellent air flow with the accompanying benefit of internal baffles to arrest wind-driven rain entering. The Type W makes use of positive and negative air pressure to aid functionality. It permits the cavity to breathe and evacuate water from lintels, trays and DPCs.


PRODUCT NAME - GROUP Type W Caviweep-Vent
CAVITY WIDTHS ACCOMMODATED All – width does not affect functionality
DIMENSIONS Type W - 105mm x 65mm x 9.5mm Ext duct – 200/225mm x 65mm x 10mm
TRADITIONAL CONSTRUCTION COMPATIBLE Yes
TIMBER FRAME CONSTRUCTION COMPATIBLE Yes
NEW WORK APPLICATIONS Yes
RETROFIT APPLICATIONS Yes
MASONRY SKIN STYLES Suits all
UNDULATING MASONRY FACES Compatible
AIR FLOW AT GRILLE 320mm ²
MATERIAL Polyprop
COLOURS Grey, black, beige, brown, white, clear & terracotta to merge with wall/mortar
PACK SIZE Packs of 50
CFC CFC Free
ODP Zero
REGULATION COMPLIANCE Yes
MAY BE USED IF CAVITY INSULATION PRESENT? Yes with compliant insulation types
CAD DOWNLOADS Yes
DESIGN CONSIDERATIONS Suggested centres 900mm

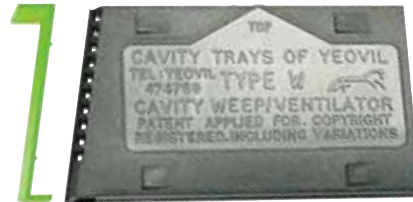

Type W Render Cover


Type W Extension Duct - Extension duct for connection to rear of Type W to provide lengthened version to service masonry skins of increased thickness. Can be cut on site if required.
Type W Render Cover - Florescent coloured cover clips to front of Type W to provide protection and keep grille free of contamination during rendering or similar works.

PRODUCT NAME - GROUP Type W Extension Duct
DIMENSIONS 200/225 x 65 x 10mm
AIR FLOW RATING 300mm ²
MATERIAL Polypropylene
COLOUR Grey
BOXED Packs contain 50 extensions.

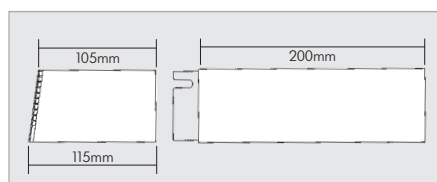

Type W Extension Duct

PRODUCT NAME - GROUP Type W Cover
DIMENSIONS 68 x 10mm
MATERIAL Polypropylene
COLOUR Florescent green
BOXED Packs contain 50 covers

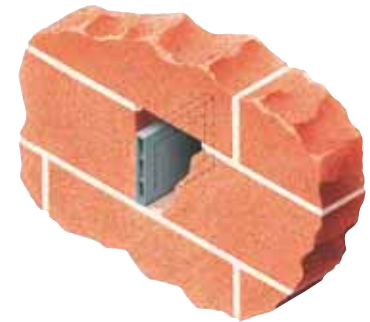

Euroweep-vent

The compact Euroweep-vent provides ventilation to the cavity and an exit route through which water can discharge from trays, lintels and DPCs. Compact size, high air flow rating and minimalist vertical front provide a compromise visually between full perp and small alternatives.

PRODUCT NAME - GROUP Euroweep-vent
CAVITY WIDTHS ACCOMMODATED All – width does not affect functionality
DIMENSIONS 87mm x 49mm x 9mm
TRADITIONAL CONSTRUCTION COMPATIBLE Yes
TIMBER FRAME CONSTRUCTION COMPATIBLE Yes
NEW WORK APPLICATIONS Yes
RETROFIT APPLICATIONS Yes
MASONRY SKIN STYLES Suits all
UNDULATING MASONRY FACES Compatible
AIR FLOW AT GRILLE 300mm ²
MATERIAL Polyprop
COLOURS Grey, black, beige, brown, white, clear & terracotta to merge with wall/mortar
PACK SIZE Packs of 50
CFC CFC Free
ODP Zero
REGULATION COMPLIANCE Yes
MAY BE USED IF CAVITY INSULATION PRESENT? Yes with compliant insulation types
CAD DOWNLOADS Yes
DESIGN CONSIDERATIONS Suggested centres 675mm