


Ventilation at Eaves & Fascia Level

- 1 CSV
- 2 Type CRSV
- 3 Type CV
- 4 Type EROV 400
- 5 Type OEVWF
- 6 Type OFV-10
- 7 Type OFV-25
- 8 Type PV
- 9 Type T
- 10 Type T Long Channel
- 11 Three-in-one
- 12 Type Rev
- 13 Type ECF

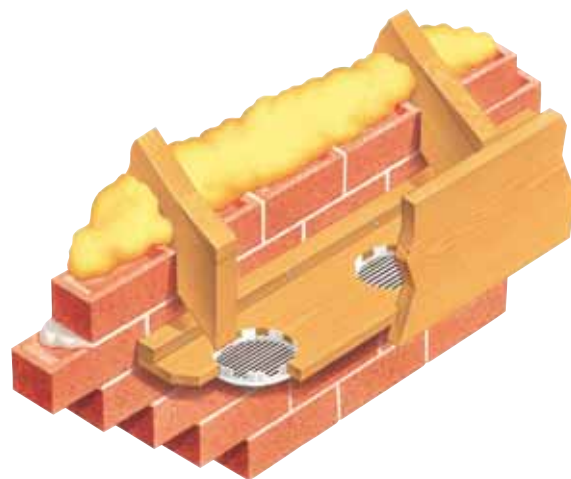

Type CSV

Circular Soffit Ventilator

- Superior airflow 2,100m²
- New and existing work applications
- Rotate for visual or non-visual appearance
- Insect screening
- Easy regulation compliance

PRODUCT NAME	Type CSV Circular Soffit Ventilator
SIZE	70/79 x 15mm
FREE AIRFLOW RATING	2,100mm ² - frequency dictates airflow level
COLOURS	Black White Brown
MATERIAL	Polypropylene
OBSERVATIONS	Requires 70mm hole

USE

Circular Soffit Ventilators with louvres, for new and existing work. Ventilators promote the entry of air into the roof space.

SOLUTION

The upgraded CSV Circular Soffit Ventilator may be introduced into new soffits or existing soffits. It permits easy and quick upgrading of existing structures.

The unique injection moulded ventilator has a deflecting louvred face, promoting positive air entry and insect screening. Unlike standard ventilators, the unique CSV may be rotated so that the louvres slope downwards towards the masonry face. In so doing, no visible apertures/grilles are apparent to the eye and the result is of a continuous unpenetrated soffit, when a CSV of a matching colour is fitted.

This ventilator has a greater air throughput than most models, and fewer are required per metre run to satisfy requirements.

