

Type SSV-15

SSV15 (for pitches below 15°)

- Regulation airflow compliance for pitches below 15 degrees
- Integral fly screening
- Accommodates different soffit thicknesses
- Self coloured - corrosion proof

PRODUCT NAME	Type SSV – 15 Strip Soffit Ventilator low pitches
SIZE	2400 x 80 x 20mm
FREE AIRFLOW RATING	25,000mm ² per running metre pitches under 15°
COLOURS	White Brown Black
MATERIAL	PVCU
OBSERVATIONS	Predrilled fixing holes




USE

Permits entry of air via soffit.

SOLUTION

The Type SSV-15 strip soffit ventilator is designed for use with a standard soffit board on roof pitches below 15 degrees. The airflow rating is 25,000mm² per metre run, making it suitable for use where the roof pitch is 15 degrees or below.

The ventilation slots provide screening in accordance with regulations.

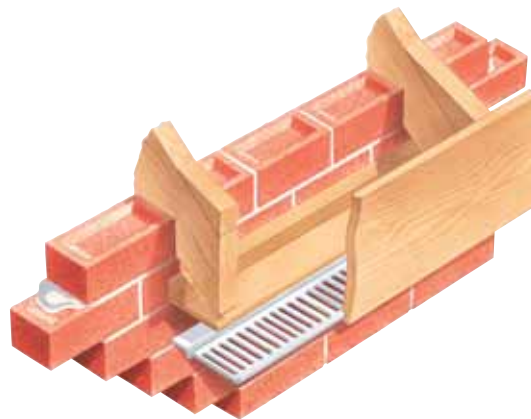

Type SV-FL

Flat Strip Soffit Ventilator

- Flat and sloping roof applications
- 25,000mm² airflow rating
- Self coloured – corrosion proof
- Insect screening

PRODUCT NAME	Type SV- FL Soffit Ventilator for Flat Roofs
SIZE	2400 x 80mm
FREE AIRFLOW RATING	25,000mm ² per running metre pitches under 15°
COLOURS	White Brown Black
MATERIAL	PVCU
OBSERVATIONS	Predrilled fixing holes

USE

Permits entry of air via soffit.

SOLUTION

The Type SV-FL is a strip soffit ventilator designed for use with flat and sloping soffit and has an airflow rating of 25,000mm² per metre run. Thus it may be used where the roof pitch is below 15 degrees.

The ventilation slots provide screening in accordance with regulations.

