


Specifications

Product name - group	Type CRSS Continuous Running Soaker Strip
Dimensions	3000mm 190mm x 105mm high upstand
Roof pitch suitability	22.5° to 60°
Bespoke options	No
Traditional construction compatible	Yes
Timber frame construction compatible	Yes
New work applications	Yes
Retrofit applications	Yes
Masonry skin styles	Most – avoid recessed pointing adjacent
Undulating masonry faces	No – surface required to be flat and vertical
Congruent with other wall elements	No identified incompatibility
Arrested water evacuation	Gutter
Thermal transmission of material	N/A external of masonry face
Material	Glass reinforced polyester
Colour	Grey finish
Extrudes / compresses under load	No
Pack size	Available individually
CFC	CFC Free
ODP	Zero
Regulation compliance	Can be used to provide weathering provision
May be used if cavity insulation present?	Yes – presence does not affect
CAD downloads	Yes
Design considerations	Upstand must finish against wall surface to permit flashings to be dressed appropriately.

TYPE CRSS

Continuous Running Soaker Strip

- Pre-shaped continuous soaker/secret gutter
- For roof pitches 22.5° to 60°
- Not visible once installed
- Lightweight and easy to handle

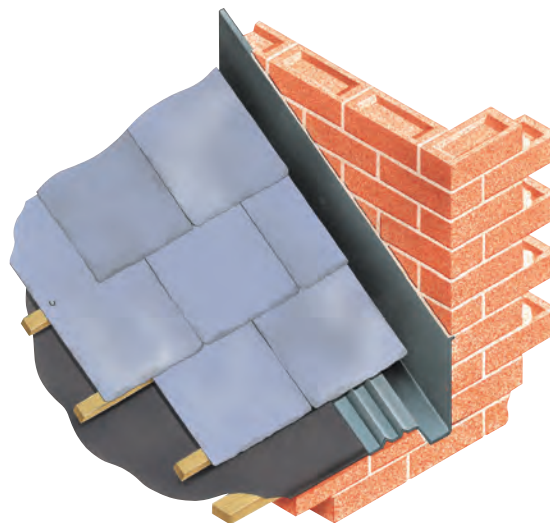

Use


Continuous soaker for use where a slate roof abuts a masonry wall.

Solution

The Continuous Running Soaker Strip may be used instead of conventional lead soakers where a roof of slate abuts a vertical fair faced masonry wall.

Manufactured from glass reinforced polyester and coloured grey, the strip provides a lower cost water arrestment option. Conventional lead may still be used at the saddle.

The upstand is required to rise tightly against the masonry face and has an unlipped top so no chasing is necessary. The upstand can be secured to the masonry if required either by mechanically fixing or by using an appropriate bonding adhesive.

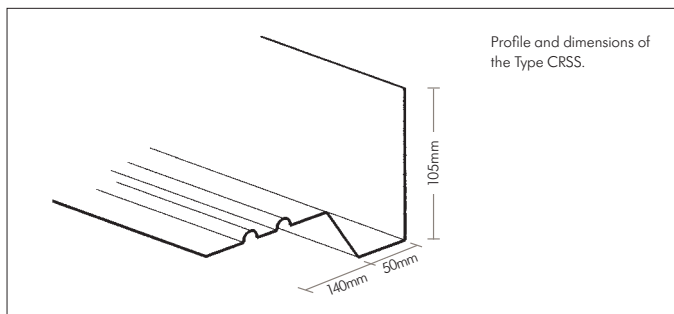

Designers' Comments

Secure CRSS by nailing to the continuous batten below it that should run parallel with and approximately 100mm from the abutment wall. Allow end laps of 225mm minimum. At gutter extend 150mm and cut back vertical surface at the overhang.

Bill of Quantity / Specification Wording

Type CRSS Continuous Running Soaker Strip

Manufacturer: Cavity Trays Ltd, Yeovil Somerset BA22 8HU Tel: 01935 474769

Incorporate where sloping slate roofs intersect masonry walls. Metres run _____.



Type CRSS Continuous Running Soaker Strip at slate/wall junction with Type X Cavitytray flashings dressing over CRSS upstand