


Quickcloser

Vertical closer with flexible insulating core

- Closes the reveal
- Insulates cavities from 40mm to 100mm wide
- Acts as a DPC
- New and existing structure applications
- Integral Fins

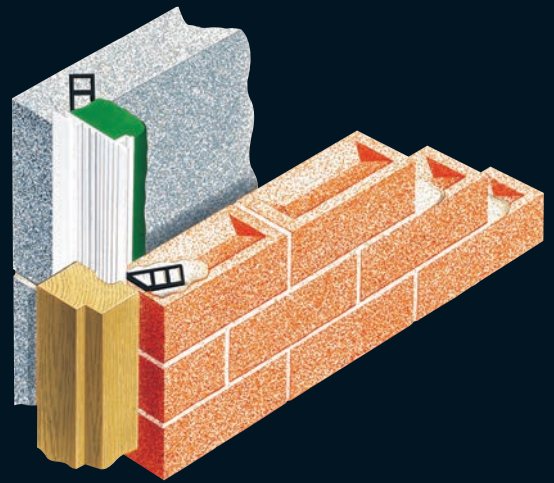

REQUIREMENT

To close, insulate and act as a vertical dpc in reveals with cavities of variable width.

SOLUTION

The Quickcloser has a flexible insulating core within a polythene sleeve. This can be shaped to size to suit the cavity width sought by the installer as the wall is raised. Accompanying wall ties secure the Quickcloser to the masonry skins.

This product can also be successfully introduced into existing cavities in new and existing applications.

REFERENCES





- Building Regulations Part L
- British Standard 5628-3
- BRE Thermal Insulation Avoiding Risks
- Website: cavitytraystandards.co.uk
- Robust Details
- Scottish Tech Standards Part D

SPECIFICATION WORDING

Quickcloser by Cavity Trays of Yeovil Somerset BA22 8HU (01935 474769) to close cavity wall reveals where cavities are between 40mm to 100mm range.

REFURBISHMENT APPLICATIONS TYPE RC CAVICLOSERS

Please note this Quickcloser design can now fulfil all functions of those products and accordingly has superseded them. Existing specifications calling for superseded models will be offered the latest standard.

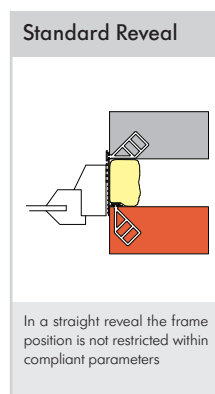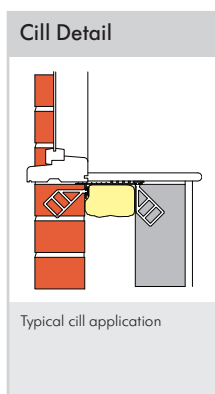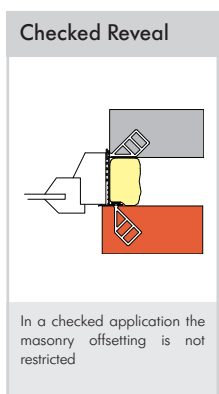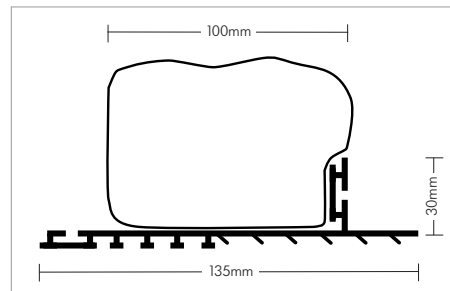

COMPUTER REFERENCE CODES:
QUICK 2.1
QUICK 2.4

DESIGNERS' COMMENTS

The installer creates the shape of the closing insulation, which can be helpful if the cavity masonry faces are undulating or inconsistent.

PRODUCT NAME - GROUP

Quickcloser

EXPOSURE RATING

Severe

CAVITY - STANDARD SIZES ACCOMMODATED

Insulation shapes from 40mm up to 100mm max

SPECIAL/UNUSUAL CAVITY WIDTHS ACCOMMODATED

Yes - within above range

STRAIGHT REVEALS

Yes - build in profile as supplied

CHECKED REVEALS

Yes - Turn section 90° & build in as illustrated

PRODUCT LENGTHS

2.1m and 2.4m

ACTS AS VERTICAL DPC

Yes

ACTS AS INSULATOR

Yes

PERMITS DIFFERENT FRAME POSITIONS

Yes

FRAMES FITTED AS WORK PROCEEDS OR LATER

Yes - first or second fix options possible

TIMBER FRAME / TRADITIONAL CONSTRUCTION

Can suit both styles

MASONRY SKIN STYLES

All popular flat faced masonry

ACOUSTIC INSULATOR

Yes - reduction by sleeved insulation

FIRE RATED

No (see Cavi prefixed range for fire rated)

VERTICAL AND HORIZONTAL APPLICATIONS

Yes - see examples

COMPATIBLE WITH OTHER CAVITY WALL ELEMENTS

Retro cavity fill could alter insulation sleeve shape

SECURING TIES SUPPLIED

Yes

PACK SIZES

x 10 lengths

WEIGHT PER PACK

2.1m x 10 = 13.5kg, 2.4 x 10 = 15 kg

MATERIAL

PVCU + siliconised rock wool insulator

COLOUR

White + green encapsulation sleeve

BUILDING REGULATIONS

Yes regulations can be satisfied

NHBC / ROBUST DETAILS

Yes requirements can be satisfied

'K' VALUE OF INSULATION

0.035W/mK (varies when compressed)

CFC FREE

Yes

CAD DRAWING DOWNLOADS AVAILABLE

Yes

